

## 360° SURFACE/FLUSH MOUNT PRESENCE DETECTOR

**OS-461P**  
**Model No. 55-461**

- Security
- Convenience
- Safety
- Energy Saving

### FEATURES

- Surface/Flush Mount
- Superior Detection ensures reliable detection
- High performance for optimum switching
- Built in walk test function
- Lens shield included for minimizing or blocking detecting fields

### TECHNICAL SPECIFICATIONS

**Detection Range:** 360° circular, max.  $\Phi$ 7m at 2.5m high

**Lux adjustment:** 10 Lux to 2000 Lux

**Time setting:** 5 sec to 30 min

**Operating Temperature:** 0°C to +45°C (Indoor usage)

**Temperature:** -20° to +45°C (Outdoor usage)

**Load**


Incandescent Lamps:	Max. 2000W
HV Halogen Lamps:	Max 1000W
LV Halogen Lamps:	Max 1000VA
Fluorescent Lamps:	Max. 900VA/100 $\mu$ F
Energy Saving Lamp (CFL):	600VA (400W) Max (includes CFL & PL Lamps)
LED Lamp:	Max: 500VA /400W

**Dimensions:** 111.5  $\Phi$  x 59mm high



**Protection:** Environmental Protection to IP44

### Warning!

Warranty void unless installed by a licensed electrician.

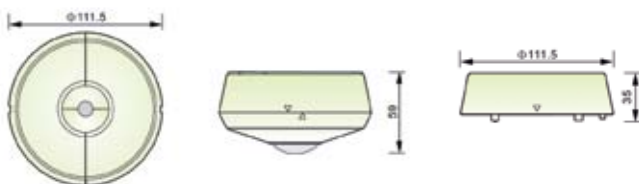

✓ N2159

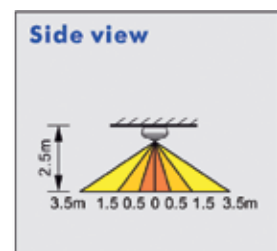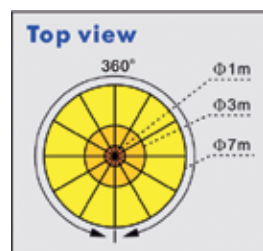

Dual element sensor to detect a small hand waving movement