

2 x 10W Tri-Colour Spotlights




■ Features


- ❑ Wall/ceiling mount (non-sensor models)
- ❑ 2000 Lumens
- ❑ High quality aluminium frame acts as a heat-sink
- ❑ Quick connect base
- ❑ Manual override wiring option
- ❑ Switchable colour temperature
- ❑ Environmental protection IP54

■ Sensor

- ❑ 180° detection angle
- ❑ 12m detection range
- ❑ Lux level adjustment
- ❑ Time duration adjustment
- ❑ Built-in daylight sensor

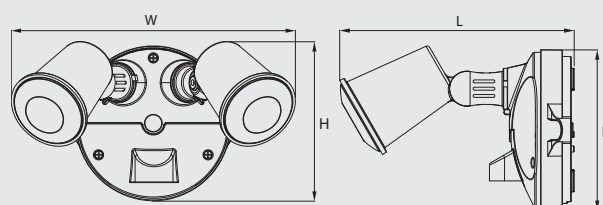

Non-Sensor model

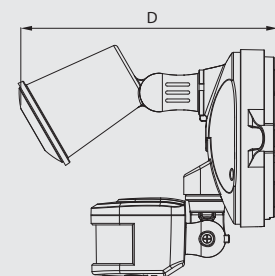

Sensor model

■ Technical Specifications

	Sensor	Non-Sensor
Mounting	Wall	Wall/Ceiling
Sensor Type	Passive IR	–
Detection Range	9m (side) 12m (front) @2m	–
Detection Angle	140°	–
Time on Adjustment	5 sec to 5 mins	–
Lux Setting (Lux)	0 to 2000	–
Light Intensity (Lumens)	2000	2000
Colour Temp	3000K, 4000K, 5000K	3000K, 4000K, 5000K
SMD	Seoul/Cree	Seoul/Cree
Voltage	100 to 240V AC 50Hz	100 to 240V AC 50Hz
Operating Temp	-20°C to +50°C	-20°C to +50°C
IP Rating	IP54 (outdoor use)	IP54 (outdoor use)

Part Number	Description	UOM	Pack Qty	Ctn Qty	Dimensions (L x W x H)mm
55-160	Twin 10W LED Tricolour Sensor, Quick Connect Base - Black	Each	1	8	203 x 160 x 146
55-162	Twin 10W LED Tricolour, Quick Connect Base - Black	Each	1	8	203 x 160 x 112