

KEYPAD OUTDOOR WEATHERPROOF



20-962




| Description | Colour | Model |
|---|----------|--------|
| Standalone Keypad, 500 users, Backlit, Weatherproof | Charcoal | 20-962 |

- IP65 and UV resistant
- Up to 500 users can be coded using smart enroll and delete technology
- Three user levels: Normal (single pin), Secure (dual pin) and Master
- Pin code length: 4 to 8 digits
- Ten auxiliary modes including door ajar, forced door and door monitor

TECHNICAL DATA

| | |
|--------------------------------|---|
| Operating Voltage Range | 12 to 24V DC (From a Regulated Power Supply) 16 to 24V AC (From a Transformer) |
| Relay Outputs | Lock Strike: Form C, 5 Amp Auxiliary: Form C, 5 Amp |
| Inputs | N.O., Dry Contact Auxiliary (In/Monitor) N.O., Dry Contact |
| LEDs | Two Tri-Coloured LEDs with Additional LED Control Feature |
| Tamper Output | Open Collector, Active Low 32mA Max Sink Current |
| PIN Codes | 8 Formats Supported; From Single Key Up to 8 Digit PIN Codes |
| LED Control Input | Dry Contact, Normally Open |
| Reader Inputs | Supports 2 Standard Wiegand 26 Bit Readers/Pin Keypads |
| 3 Security Modes | Three Modes Of Operation; Normal/Bypass/Secure |
| Audio/Visual | Built in Sounder (Bell, Chime, Siren) |
| Dimensions | 44 (w) x 135 (h) x 28 (d) mm |

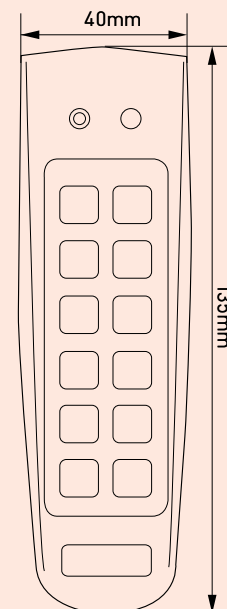

01-121

ACCESSORIES

| Description | Model |
|-----------------------|--------|
| 12V DC Power Supply | 01-121 |
| Solenoid Gate Release | 10-110 |